

The Numbers Do Not Lie

- EPDM flat roof membranes have a life expectancy of at least 50 years.
- **Half-century** track record of performance and durability.
- EPDM is **Environmentally Friendly**.

Unrivalled


- **Unmatched weatherability**
- **Flexibility**
- **Economical**
- **First manufacturer** to exceed 10 billion square feet of EPDM membrane production.
- **Pressure-sensitive accessories** available for virtually any penetration or detail.

For You

- **Wide variety of sheet thicknesses and widths** – To suit each individual project and customer needs.
- **Seamless – Completely Reliable**
- **Safe** – Heat free installation.

Pressure Sensitive Accessories

ClassicBond 75mm PS Secure Tape

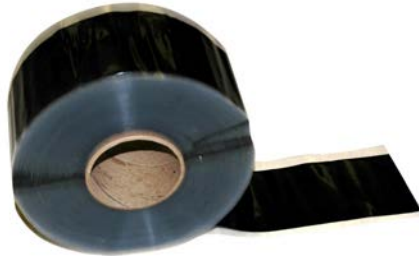

Pressure-Sensitive Secure tape offers uniform width and adhesive thickness and is manufactured using a clear poly film for application ease. Secure tape delivers 30% greater peel strength and 32% greater shear strength when compared to other tapes available in today's marketplace.

Intended Uses

Tape designed for use with Classic Bond Fully-Adhered, Ballasted and Mechanically-Fastened Roofing system, to fuse EPDM membranes together in the field for long-term splice strength.

Features and Benefits

- Available in 75mm wide by 30.5m long rolls
- Manufactured using a clear poly film
- Excellent long-term splice strength
- Greater peel and shear strength than other tapes available in today's marketplace

Typical Properties and Characteristics - 75mm PS Secure Tape

Colour	Black
Base	Synthetic Rubber
Roll Size	30.5m
Thickness	0.89mm
Packaging	4 rolls / carton
Net Wt. Per Roll	3kg
Shelf Life	1 year

75mm PS Secure Tape must be used in conjunction with ClassicBond Primer.

The Numbers Do Not Lie

- **EPDM flat roof** membranes have a life expectancy of at least 50 years.
- **Half-century** track record of performance and durability.
- **EPDM is Environmentally Friendly.**

Unrivalled

- **Unmatched weatherability**
- **Flexibility**
- **Economical**
- **First manufacturer** to exceed 10 billion square feet of EPDM membrane production.
- **Pressure-sensitive accessories** available for virtually any penetration or detail.

For You

- **Wide variety of sheet thicknesses and widths** – To suit each individual project and customer needs.
- **Seamless – Completely Reliable**
- **Safe** – Heat free installation.

ClassicBond 150mm PS Overlayment Strip



ClassicBond PS Overlayment Strip will speed up any roofing job, saving you valuable time and money.

Intended Uses

Pressure-Sensitive Overlayment Strip is designed for stripping in metal edging, drip edges and Fastening Plates.

Features and Benefits

- Available in 150mm wide by 30.5m long rolls
- Ideal for stripping in gravel stops, metal edging, drip edges and seam fastening plates
- 1.02mm semi cured EPDM laminated to a 0.89mm fully cured, synthetic rubber based, pressure-sensitive adhesive
- Resists tearing, cracking and abrasion in all weather conditions
- Speeds installation by up to 50% reducing labour costs

Typical Properties and Characteristics - 150mm PS Overlayment Tape	
Colour	Black
Base	Membrane - EPDM Adhesive - Synthetic Rubber
Tensile Strength	800 psi (5.5 Mpa) minimum
Elongation	500-700%
Tear Resistance	19.2-21.0 kN/m
Ozone Resistance	No cracks
Brittleness Temp	-45°C
Nominal Thickness	1.91 mm
Nominal Width	Membrane 150mm Adhesive 155mm
Net Weight per Roll	10 kg
Shelf Life	1 year

150mm PS Overlayment Strip must be used in conjunction with Classic Bond Primer.

The Numbers Do Not Lie

- **EPDM flat roof** membranes have a life expectancy of at least 50 years.
- **Half-century** track record of performance and durability.
- **EPDM is Environmentally Friendly.**

Unrivalled

- **Unmatched weatherability**
- **Flexibility**
- **Economical**
- **First manufacturer** to exceed 10 billion square feet of EPDM membrane production.
- **Pressure-sensitive accessories** available for virtually any penetration or detail.

For You

- **Wide variety of sheet thicknesses and widths** – To suit each individual project and customer needs.
- **Seamless – Completely Reliable**
- **Safe** – Heat free installation.

ClassicBond 225mm PS Elastoform Flashing



An uncured, EPDM membrane laminated to fully cured pressure-sensitive tape. The flashing membrane is easily malleable and highly adaptable to irregular shapes and surfaces. It is self-curing and can be used to flash pipes, corners, outlets and other roof systems structures and penetrations. The clear poly release liner enables easy clean, positioning and marking of the tapes before installation.

Intended Uses

Pressure-Sensitive Elastoform Flashing is ideal for all flashing and water proofing of penetrations and details through the roof membrane and its perimeter.

Features and Benefits

- Available in 225mm by 15.25m rolls
- Adaptable to irregular shapes and surfaces
- Self-curing membrane
- Labour and cost savings in field applications

Typical Properties and Characteristics - 225mm Elastoform Flashing	
Colour	Black
Base	Membrane - EPDM Adhesive - Synthetic Rubber
Ozone Resistance	No cracks
Brittleness Temp	-45°C
Nominal Thickness	1.91 mm
Nominal Width	Membrane 225mm Adhesive 230mm
Net Weight per Roll	10.46 kg

225mm PS Elastoform Flashing must be used in conjunction with ClassicBond Primer.

The Numbers Do Not Lie

- **EPDM flat roof** membranes have a life expectancy of at least 50 years.
- **Half-century** track record of performance and durability.
- **EPDM is Environmentally Friendly.**

Unrivalled

- **Unmatched weatherability**
- **Flexibility**
- **Economical**
- **First manufacturer** to exceed 10 billion square feet of EPDM membrane production.
- **Pressure-sensitive accessories** available for virtually any penetration or detail.

For You

- **Wide variety of sheet thicknesses and widths** – To suit each individual project and customer needs.
- **Seamless – Completely Reliable**
- **Safe** – Heat free installation.

ClassicBond Pressure-Sensitive Walkway Pads



ClassicBond Walkway Pads are designed to protect the membrane in those areas exposed to repetitive foot traffic.

Intended Uses

1. Walkways must be installed at all traffic concentration points (i.e., roof hatches, access doors, rooftop ladders, etc.) regardless of traffic frequency.
2. Walkways must also be installed if regular maintenance (once a month or more) is necessary to service rooftop equipment.

Features and Benefits

- Excellent tear and puncture resistance
- UV resistant
- Slip resistant
- Backed with Pressure Sensitive taped and used in conjunction with ClassicBond Primer

Typical Properties and Characteristics - PS Walkway Pads	
Colour	Black
Pad Thickness	min 5mm max 10mm
Performance Requirements	70
Density, pct	
Tensile Strength, psi ASTM D 412 Unaged	500
Tear Resistance, ppi ASTM D 624 Unaged	250
Ozone Resistance	No cracks
Pad size	760 mm X 760 mm
Net Weight per Pad	3.6 kg

PS Walk Way pads must be used in conjunction with ClassicBond Primer.

The Numbers Do Not Lie

- **EPDM flat roof** membranes have a life expectancy of at least 50 years.
- **Half-century** track record of performance and durability.
- **EPDM is Environmentally Friendly.**

Unrivalled

- **Unmatched weatherability**
- **Flexibility**
- **Economical**
- **First manufacturer** to exceed 10 billion square feet of EPDM membrane production.
- **Pressure-sensitive accessories** available for virtually any penetration or detail.

For You

- **Wide variety of sheet thicknesses and widths** – To suit each individual project and customer needs.
- **Seamless – Completely Reliable**
- **Safe** – Heat free installation.

ClassicBond Pressure-Sensitive Pipe Seals



PS Pipe Seals are cured, pre-moulded EPDM flashing for pipes up to 150mm diameter. Small pipe seals are designed for 15mm to 75mm diameter, larger penetrations are catered for with a pipe seal designed it to fit 15mm to 150mm diameter pipes.

Intended Uses

PS Pipe Seals are ideal for flashing pipes up to 150mm in diameter.

Features and Benefits

Available in 15mm - 75mm and 15mm - 150mm in diameter

- PS Pipe Seals have pre-applied Secure Tape on the bottom of the deck flange which affords easy installation and strong membrane bonding

Typical Properties and Characteristics - PS Pipe Seals	
Colour	Black
Material	Moulded EPDM
Ozone Resistance	No cracks
Pipe Seal Size	15mm - 150mm
Net Weight per Pad	0.5 kg - large

PS walkway pads must be used in conjunction with ClassicBond Primer.